

# JOBO CAN MID



# Advanced control & measurement system




## Technical specification


MultiGrip™ MultiStem™

- 9-32V DC operating voltage
- -30...+70°C operating temperature
- 7" WVGA color TFT LCD display (resolution 800x480)
- IP67 aluminium case
- 2x CAN Interface 2.0 B, ISO 11898
- 1x USB interface
- Real time clock (RTC)
- 4x composite video Inputs
- Length measure by both stroke and roll
- Select- 6 species x 6 lengths per species
- Diameter measurement (option)
- Joystick control as standard (additional CAN-modul)


## Details

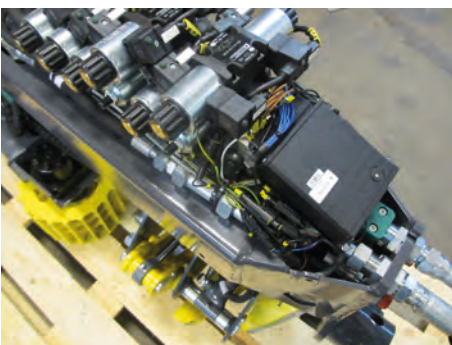

Well protected CAN-module in the head (CCM).

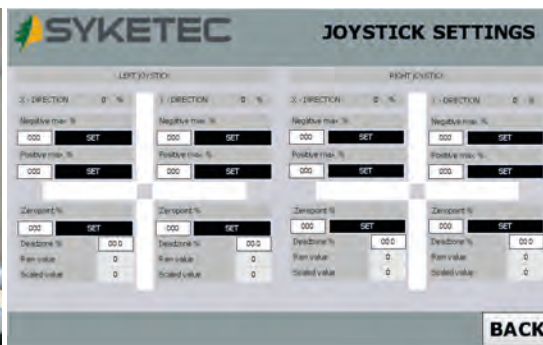

As standard joystick controls by a 0-5 VDC signal.  
Easy adjustment of control behaviour.

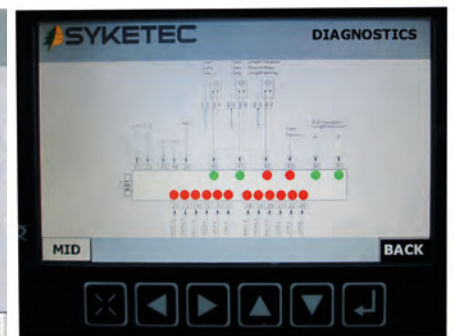

System includes internal diagnostics which shows all functions in real time.